



A product of **FLO-MAX**
PUMPS


Laboratory Freezers & Refrigerators



Content

	4°C Blood Bank Refrigerator-----	2
	2~8°C Laboratory Refrigerator-----	6
	-25°C Freezer-----	17
	-30°C Freezer-----	21
	-40°C Freezer-----	22
	-60°C Freezer-----	28
	-86°C Freezer-----	32
	-150°C Freezer-----	39
	Freezer Racks and Boxes-----	40


Blood Bank Refrigerator($4\pm 1^{\circ}\text{C}$)

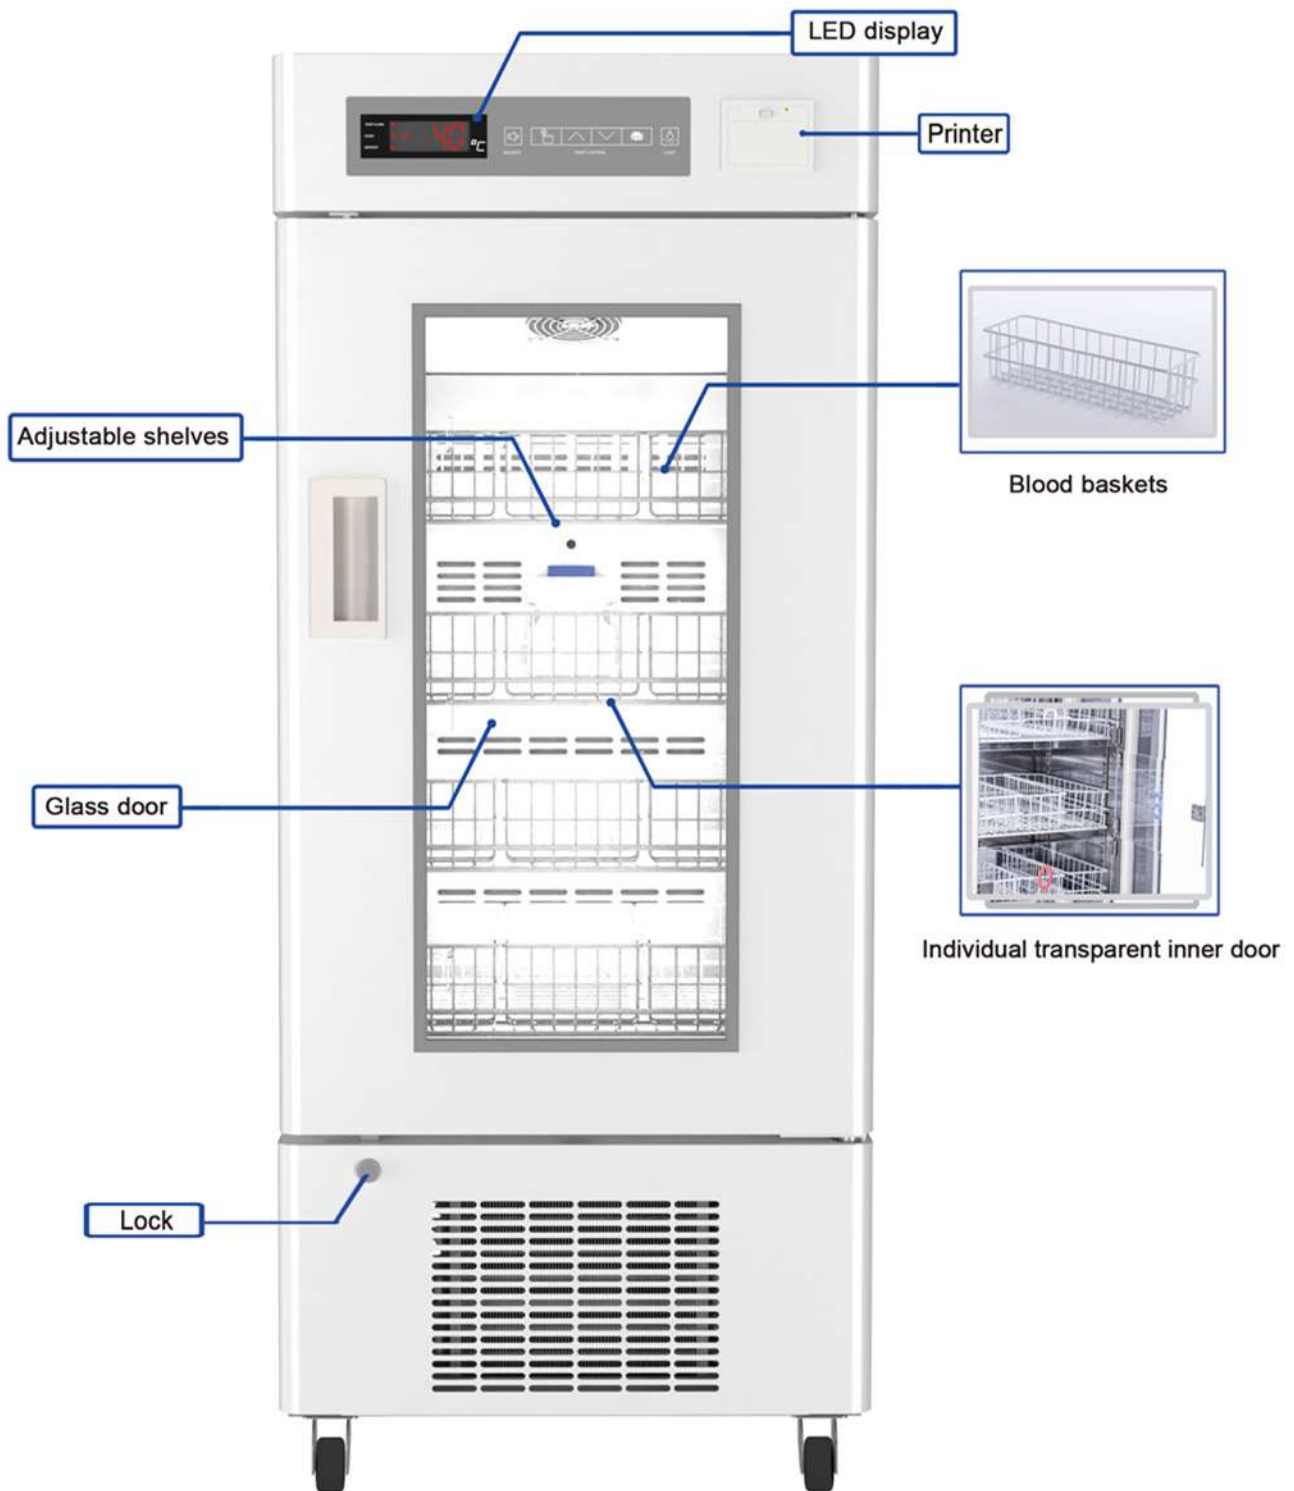

Blood Bank Refrigerator

Advantage

1. Multiple sensors design: make sure the precise monitoring and programming.
2. Unibody Design, Mono-assembly foaming (Rigid polyurethane insulation material).
3. Forced air refrigeration system, ensure inner temperature constant and uniform.
4. Adjustable shelves, improve space utilization; blood storage baskets can be classified.
5. Individual transparent inner door, effectively reduce cool air loss when opening the door.

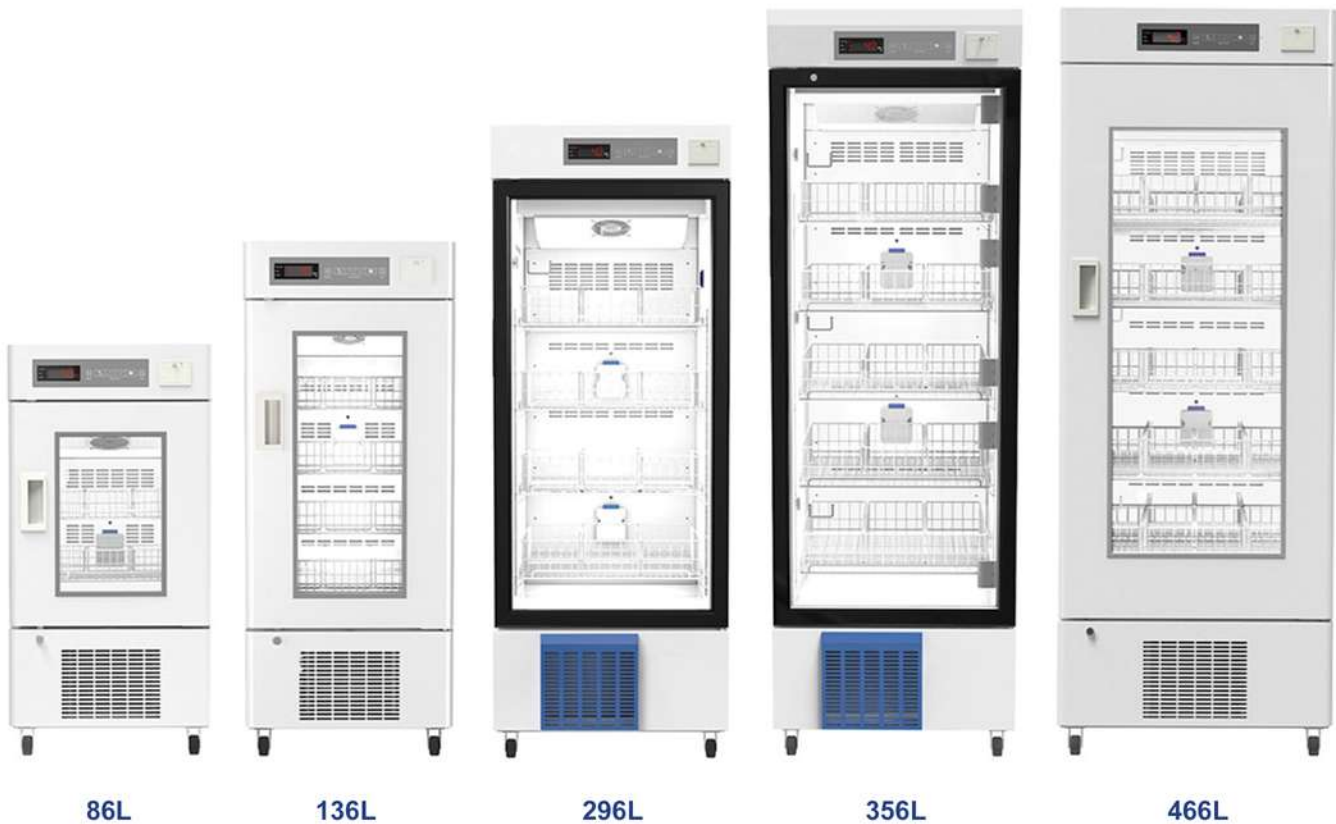

Technical Parameters

Model	FMR-4V86	FMR-4V136	FMR-4V296	FMR-4V356	FMR-4V466
Capacity	86L	136L	296L	356L	466L
Temp. Range	4±2°C				
Temp. Accuracy	0.1°C				
Control System	Microprocessor control				
Display	LED display				
Alarm	Audio and visual alarm for: High or low temperature, Sensor & system failure; Door ajar, Power failure				
Refrigeration Type	Forced air refrigeration system				
Refrigerant	R134a, CFC-Free				
Compressor	International famous compressor				
Condenser & Evaporator	High efficiency air-cooled condenser; Made of copper				
Defrost	Frostless design				
Construction	Unibody Design, Mono-assembly foaming (Rigid polyurethane insulation material)				
Material	Internal Material	Stainless steel			
	External Material	Sprayed steel plate			
Door	Electric heated glass semi-foamed door with lock, Acrylic inner door		Electric heating glass outer door; Acrylic inner door; Outer door with locking buckle		Electric heated glass semi-foamed door with lock, Acrylic inner door
Consumption	245W/264VA	252W/264VA	267W/528VA	352W/528VA	380W/594VA
Power Supply	AC220V±10%, 50Hz (Standard); AC110/220V,60Hz (Optional)				AC220V±10%, 50Hz (Standard)
Casters	Two universal casters with brakes, two directional casters				
Adjustable Shelves	2pcs	4pcs	4pcs	5pcs	5pcs
Baskets	6pcs	12pcs	12pcs	15pcs	20pcs
Blood Bags (450ml)	66pcs (450ml)	132pcs (450ml)	156pcs (450ml)	195pcs (450ml)	300pcs (450ml)
Standard Accessory	Thermal printer, LED lamp, The temperature test box, probe access port, door key				
Optional Accessory	Temperature recorder, USB port, RS485, Increase shelves number				
External Size(W*D*H) mm	530*660*1037	530*660*1287	630*720*1658	630*720*1886	680*747*1886
Package Size(W*D*H)mm	680*740*1330	685*750*1560	780*840*1910	770*830*2070	820*910*2080
Gross Weight	103kg	120kg	160kg	175kg	199kg

Blood Bank Refrigerator (Double Door)



Introduction:

Blood bank refrigerator series products are applied to places needing storage at constant temperature, such as hospitals, epidemic prevention stations, blood banks, scientific research institutions, colleges and universities, biological pharmacies, genetic engineering, etc. The storing temperature in the body can be regulated by the temperature button on the control panel. The application is convenient and the performance is reliable.


Advantage:

1. Multiple sensors design: make sure the precise monitoring and programming.
2. Electric heated glass semi-foamed door, easy to observe, also keep a better cooling temperature.
3. Forced air refrigeration system, ensure inner temperature constant and uniform.
4. Adjustable shelves, improve space utilization; blood storage baskets can be classified.
5. Individual transparent inner door, effectively reduce cool air loss when opening the door.


Technical Parameters

Model		FMR-4V626	FMR-4V966
Capacity		626L	966L
Temp. Range		4±2℃	
Temp. Accuracy		0.1℃	
Control System		Microprocessor control	
Display		LED display	
Alarm		Audio and visual alarm for: High or low temperature, Sensor & system failure; Door ajar, Power failure, Low battery	
Refrigeration Type		Forced air refrigeration system	
Refrigerant		R134a, CFC-Free	
Defrost		Frostless Design	
Construction		Unibody Design, Mono-assembly foaming (Rigid polyurethane insulation material)	
Material	Internal Material	Stainless steel	
	External Material	Cold-rolled steel with anti-bacteria powder coating	
Door		Electric heated glass semi-foamed door with lock, Heating film preventing frosting, Sealing joint strip with magnetic force. Transparent plastic inner door*6	
Casters		4 casters	
Consumption		550W/704VA	560W/704VA
Power Supply		AC220V±10%, 50Hz(Standard); AC110/220V,60Hz(Optional)	
Adjustable Shelves		12 pcs	12 pcs
Baskets		36 pcs	36 pcs
Blood Bags (450ml)		10*36=360 pcs	16*36=576 pcs
Standard Accessory		Temperature printer, LED lamp, probe access port, door key	
Optional Accessory		Temperature recorder, USB port, RS485, Increase shelves number	
External Size (W*D*H) mm		1220*665*1885	1220*895*1885
Package Size (W*D*H) mm		1340*750*2100	1340*980*2100
Gross Weight		250kg	286kg

Laboratory Refrigerator(2-8°C)

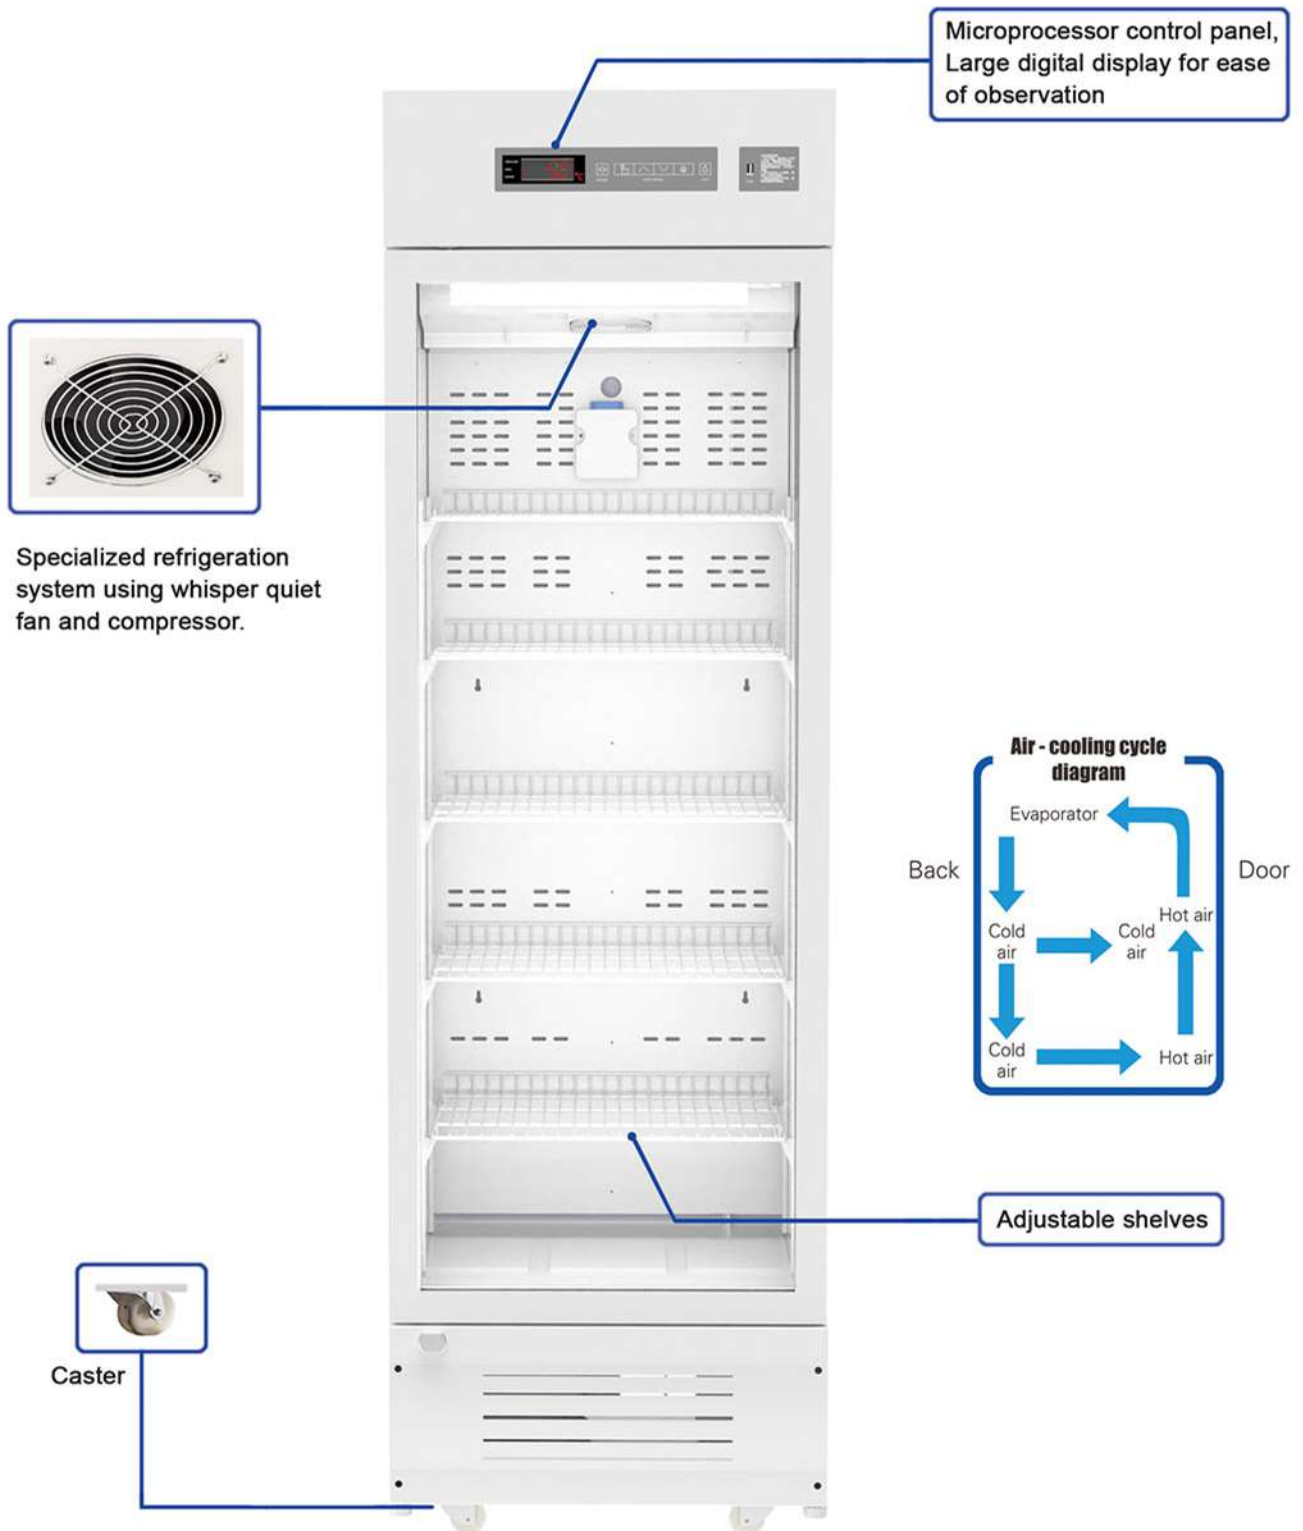

Laboratory Refrigerator(2-8°C)

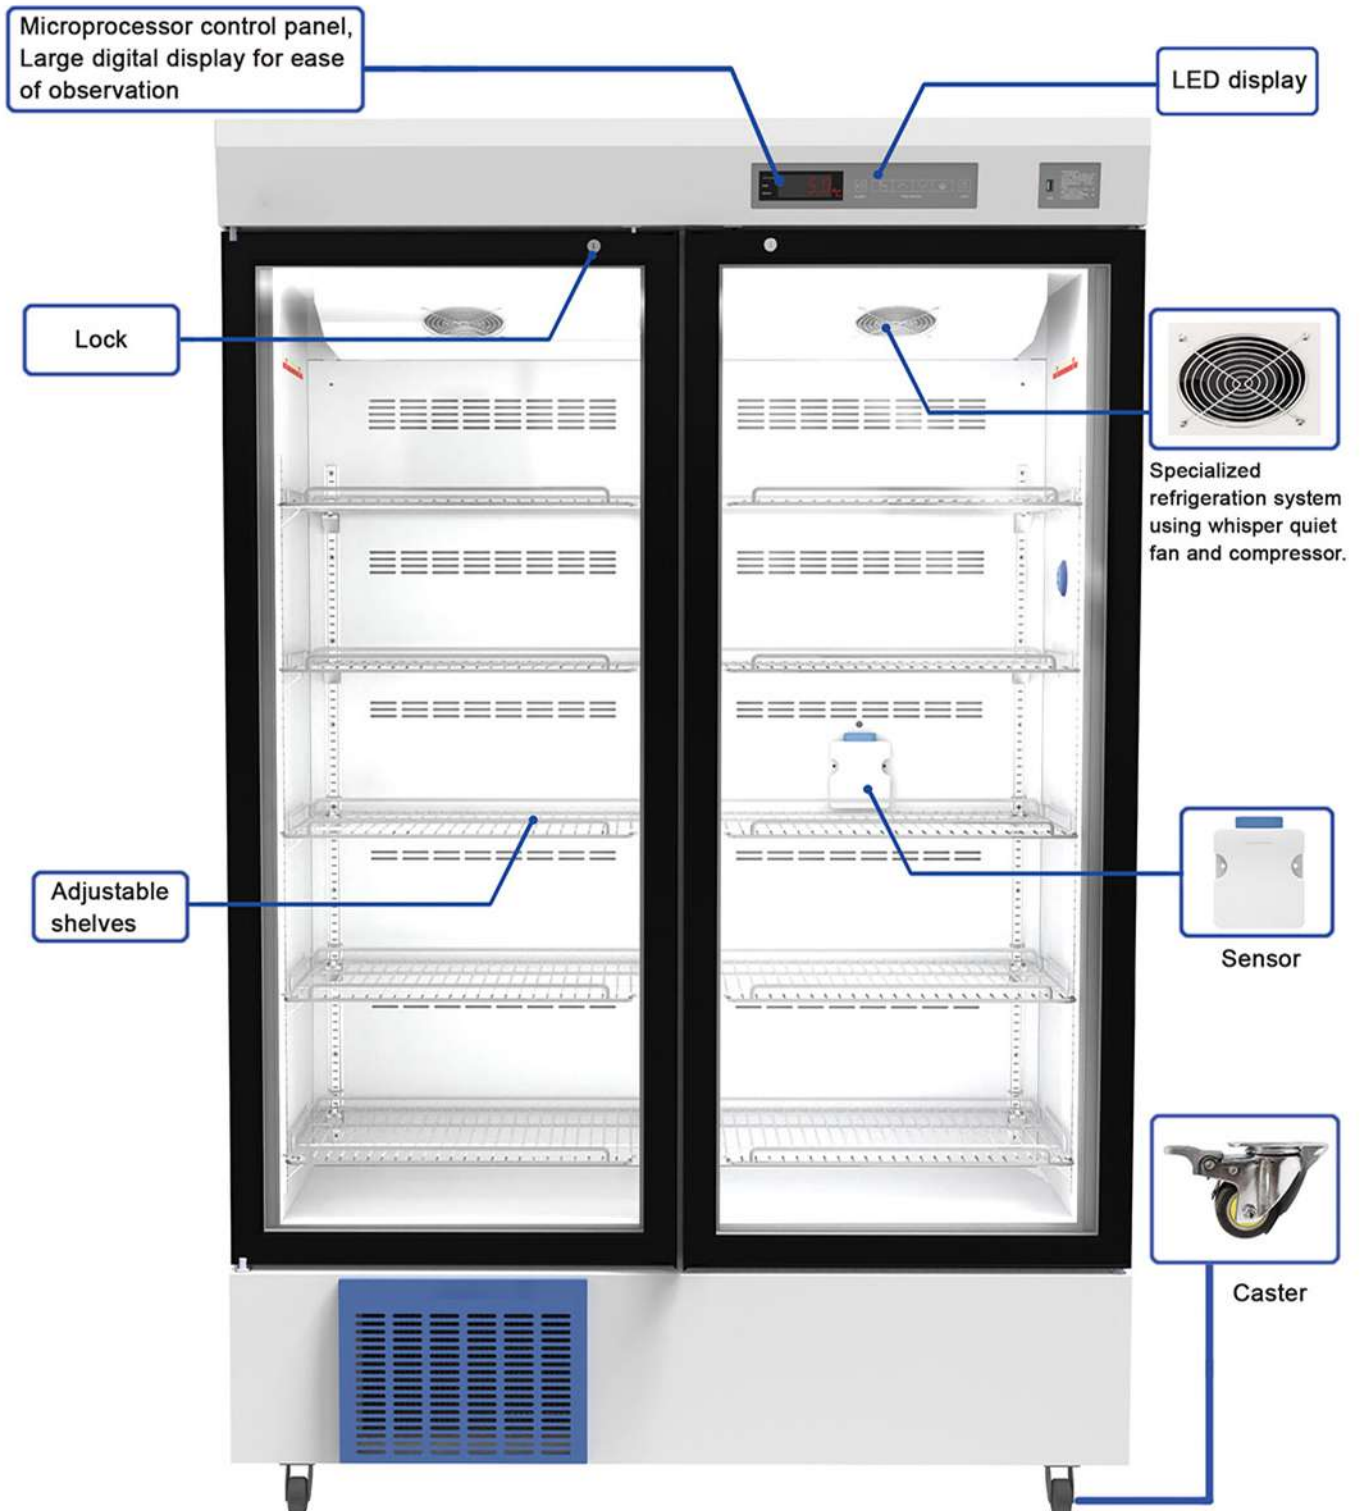

Laboratory Refrigerator



FMR-5V68F/108F



FMR-5V288F/358F/468F

Technical Parameters

Model	FMR-5V68F	FMR-5V108F	FMR-5V288F	FMR-5V358F	FMR-5V468F
Volume	68L	108L	288L	358L	468L
Type	2 pcs shelves	3 pcs shelves	4 pcs shelves	5 pcs shelves	5 pcs shelves
Refrigeration Mode	Air-cooled				
Defrosting Mode	Frost-free				
Refrigerant/g	R600a, 21g	R600a, 27g	R290, 55g	R290, 75g	R290, 97g
Noise	55dB(A)				
Ambient Temp.	10~32℃				
Temp. Range	5±3℃				
Temp. Accuracy	0.1℃				
Evaporator	Plate and tube type, copper tube and aluminum fin				
Condenser	Bundy tube		Copper tube and aluminum fin		
Sensor	NTC				
Thermostat	Electronic thermostat				
Door	Foamed cyclopentane				
Display	Digital tube display				
Interface	USB				
Power Supply	110~220V/50~60Hz				
Power	85W/154VA	95W/154VA	220W/286VA		
Current	0.7A		1A		
Internal Material	Sprayed steel plate				
External Material	Sprayed steel plate				
Lagging	Foamed polyurethane cyclopentane				
Standard Accessories	High and low temperature alarm, power fault alarm, thermostat fault alarm, door ajar alarm, LED lamp, USB port				
Optional Accessories	Printer, 485 port				
Net Weight	41kg	49kg	101kg	111kg	123kg
Gross Weight	52kg	61kg	118kg	131kg	146kg
Internal Size(W*D*H)	415*405*455mm	415*405*706mm	530*520*1096mm	530*520*1325mm	580*613*1325mm
External Size(W*D*H)	495*548*683mm	495*548*934mm	630*653*1658mm	630*653*1886mm	680*747*1886mm
Package Size(W*D*H)	560*668*858mm	560*668*1109mm	730*780*1813mm	730*780*2038mm	780*880*2048mm

Laboratory Refrigerator



Technical Parameters

Model	FMR-5V628F	FMR-5V1008F
Volume	628L	1008L
Type	5 layers, 10 pcs shelves	
Refrigeration Mode	Air-cooled	
Defrosting Mode	Automatic	
Refrigerant/g	R290, 150g	
Noise	60dB(A)	
Ambient Temp.	10~32°C	
Temp. Range	5±3°C	
Temp. Accuracy	0.1°C	
Evaporator	Copper tube and aluminum fin	
Condenser	Bundy tube	Copper tube and aluminum fin
Sensor	NTC	
Thermostat	Electronic thermostat	
Door	Foamed cyclopentane	
Display	Digital tube display	
Interface	USB	
Power Supply	110~220V/50~60Hz	
Power	296W/308VA	
Current	1.4A	
Internal Material	Sprayed steel plate	
External Material	Sprayed steel plate	
Lagging	Foamed polyurethane cyclopentane	
Standard Accessories	High and low temperature alarm, Power fault alarm, Thermostat fault alarm, Door open alarm, USB port	
Optional Accessories	Printer	
Net Weight	181kg	204kg
Gross Weight	215kg	248kg
Internal Size(W*D*H)	1100*454*1305mm	1100*684*1360mm
External Size(W*D*H)	1220*598*1886mm	1220*828*1886mm
Package Size(W*D*H)	1340*750*2100mm	1340*980*2100mm

Laboratory Refrigerator



FMR-5V68



FMR-5V108



FMR-5V118



FMR-5V238

Technical Parameters

Model		FMR-5V68	FMR-5V108	FMR-5V118	FMR-5V238
External Size(W*D*H)mm		495*548*683	495*548*934	500*550*1300	580*575*1810
Capacity		68L	108L	118L	238L
Temp. Range		2~8℃			
Temp. Accuracy		0.1℃			
Control System		Microprocessor Control, digital tube display			
Alarm		High and low temperature alarm, Power fault alarm,Thermostat fault alarm, Door ajar alarm			
Refrigeration Type		Air-cooled			
Refrigerant		R600a, CFC free, 21g	R600a, CFC free, 27g	R600a, CFC free	
Condenser &Evaporator		Copper tube and aluminum fin, Bundy tube			
Defrost		Auto defrost			
Construction	Structure	Unibody design & mono-assembly foaming (Polyurethane cyclopentane insulation material)			
	Internal Material	Spray steel plate		Embossed aluminum sheet	
	External Material	Spraying steel plate			
Shelves		2 pcs	3 pcs	4 pcs	4pcs
Door		Electric-heating glass door, no condensation			
Consumption		85W/154VA	95W/154VA	162W/220VA	170W/242VA
Power Supply		220V, 50/60Hz; 110V, 60Hz		220V, 50/60Hz	220V, 50/60Hz; 110V, 60Hz
Standard Accessories		LED lamp, USB port			
Optional Accessories		Temp. recorder, printer, shelf, RS485 port, temp. test port			
Package Size(W*D*H)mm		620*700*860	630*700*1110	610*620*1510	670*650*2000
Gross Weight		49kg	60kg	57kg	80kg

Laboratory Refrigerator



FMR-5V288S



FMR-5V358S



FMR-5V298



FMR-5V368



FMR-5V468

Technical Parameters

Model		FMR-5V288S	FMR-5V298	FMR-5V358S	FMR-5V368	FMR-5V468
External Size(W*D*H)mm		640*665*1658	620*575*1980	640*665*1886	650*600*2010	680*747*1885
Capacity		288L	298L	358L	368L	468L
Temp. Range		2~8℃				
Temp. Accuracy		0.1℃				
Control System		Microprocessor control, digital tube display				
Alarm		High and low temperature alarm, Power fault alarm, Thermostat fault alarm, Door ajar alarm				
Refrigeration Type		Air-cooled				
Refrigerant		R290, CFC-free	R600a, CFC-free	R290, CFC-free	R134a, CFC-free, 120g	R290g, CFC-free, 97g
Condenser & Evaporator Defrost		Copper tube and aluminum fin, bundy tube				
Defrost		Auto defrost				
Construction	Construction	Unibody design & mono-assembly foaming (Polyurethane cyclopentane insulation material)				
	Internal Material	Spraying steel plate	Embossed aluminum board	Spraying steel plate	Embossed aluminum board	Spraying steel plate
	External Material	Spraying steel plate				
Shelves		4 pcs	5 pcs	5 pcs	5 pcs	5 pcs
Door		Electric-heating glass door, no condensation				
Consumption		260W/264VA	189W/264VA	260W/264VA	230W/363VA	380W/594VA
Power Supply		220V, 50/60Hz; 110V, 60Hz				
Standard Accessories		LED port, USB port, temp. test port	LED port, USB port	LED port, USB port, temp. test port	LED port, USB port	LED port, USB port, temp. test port
Optional Accessories		Temp. recorder, printer, RS485 port, shelf	Temp. recorder, printer, RS485 port, shelf, temp. test port	Temp. recorder, printer, RS485 port, shelf	Temp. recorder, printer, RS485 port, shelf, temp. test port	Temp. recorder, printer, RS485 port, shelf
Package Size(W*D*H)mm		770*800*1830	720*660*2160	770*800*2060	740*695*2230	830*880*2050
Gross Weight		127kg	88kg	140kg	90kg	158kg

Laboratory Refrigerator



FMR-5V628



FMR-5V650



FMR-5V968

Technical Parameters

Model		FMR-5V628	FMR-5V650	FMR-5V968
External Size (W*D*H)mm		1220*630*1885	1220*630*1885	1220*860*1885
Capacity		628L	650L	968L
Temp. Range		2~8℃		
Temp. Accuracy		0.1℃		
Control System		Microprocessor Control, digital tube display		
Alarm		High and low temperature alarm, Power fault alarm, Thermostat fault alarm, Door ajar alarm		
Refrigeration Type		Air-cooled		
Refrigerant		R134a, CFC-free, 175g	R290a, CFC free, 150g	R134a, CFC-free, 175g
Condenser & Evaporator		Copper tube and aluminum fin, Bundy tube		
Defrost		Auto defrost		
Construction	Structure	Unibody design & mono-assembly foaming (Polyurethane cyclopentane insulation material)		
	Internal Material	Spray steel plate		
	External Material	Spraying steel plate		
Shelves		10 pcs		
Door		Electric-heating glass door, no condensation		
Consumption		537W/704VA	300W/330VA	537W/704VA
Power Supply		220V, 50/60Hz; 110V, 60Hz		
Standard Accessories		LED lamp, USB port, temp. test port		
Optional Accessories		Temp. recorder, printer, shelf, RS485 port		
Package Size (W*D*H)mm		1340*750*2100		1340*980*2100
Gross Weight		223kg		256kg

Laboratory Refrigerator



Technical Parameters

Model	FMR-5V1500	
External Size(W*D*H) mm	1800*775*1965	
Capacity	1500L	
Temp. Range	2~8℃	
Temp. Accuracy	0.1℃	
Control System	Microprocessor Control & Large Screen LED Display	
Alarm	Sensor fault, door ajar	
Refrigeration Type	Forced air refrigeration system	
Refrigerant	R134a, CFC Free	
Condenser&Evaporator	High efficiency air-cooled condenser, made of copper	
Defrost	Frostless design	
Construction	Structure	Unibody design & Mono-assembly foaming (rigid polyurethane insulation material)
	Internal Material	Stainless steel
	External Material	Stainless steel
Shelves	Adjustable shelves made of high quality steel wire	
	12 pcs	
Consumption	1040W/1000VA	
Power Supply	AC110/220V±10%, 50/60Hz	
Standard Accessory	LED lamp, Shelves, Door keys, Testing hole (only for BPR-5V650), Battery	
Optional Accessory	USB port, Printer	
Package Size(W*D*H) mm	1880*820*2150	
Gross Weight	319kg	

-25°C Freezer (Combined Refrigerator And Freezer)




FMR-25V300



FMR-25V318



FMR-25V368

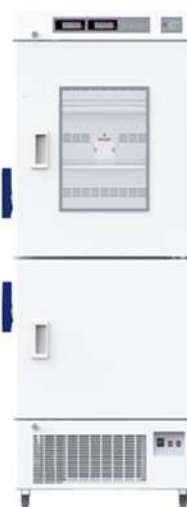

FMR-25V450

Technical Parameters

Model		FMR-25V300	FMR-25V318	FMR-25V368	FMR-25V450
Capacity		Refrigerator:174L	Refrigerator:208L	Refrigerator:183L	Refrigerator: 295L
		Freezer:126L	Freezer:110L	Freezer:185L	Freezer:155L
Temp.Range		Refrigerator: 2℃~8℃; Freezer: -10℃~-25℃			
Temp. Accuracy		0.1℃			
Control System		Microprocessor control, digital display			
Alarm		High or low temperature alarm,open the door alarm;Thermostat failure,power failure alarm			
Cooling Method		Refrigerator: Air cooling	Refrigerator: Air cooling	Refrigerator: Air refrigeration	Refrigerator: Air refrigeration
		Freezer: Direct cooling	Freezer: Direct cooling	Freezer: Direct cooling	Freezer: Direct cooling
Refrigerant		R600a	R290/39g	R290/25g	Refrigerator: R290/50g
			R290/55g	R290/40g	Freezer: R290/57g
Condenser		Bundy tube	Wire tube condenser		
	Structure	Unibody design and thickened environmental protection foam insulation layer			
Construction	Internal Material	HIPS	304 stainless steel		
	External Material	PCM plate	Sprayed steel plate		
Inner Door		No			
Consumption		264VA/160W	484VA/390W	836VA/594W	418VA/410W
Power Supply		Standard:220V 50Hz,optional:110V 60Hz			
Casters		No	Yes		
Shelf		Refrigerator: 3 shelves	Refrigerator: 3 shelves	Refrigerator:3 shelves	Refrigerator: 3 shelves
		Freezer: 3 shelves	Freezer: 1 shelf	Freezer:1 shelves	Freezer: 1 shelf
External Size(W*D*H) mm		595*600*1700	741*631*1889	750*736*1884	741*881*1889
Package Size(W*D*H) mm		630*645*1740	880*770*2090	890*880*2100	880*950*2090
Gross Weight		75kg	175kg	195kg	197kg

Remark: Standard USB port, can store 8000 pieces of data per month, data rolling coverage after the limit, can save 120 months of data.

-25°C Freezer



100L



270L



350L



936L

Technical Parameters

Model	FMF-25V100	FMF-25V270	FMF-25V350	FMF-25V936
Capacity	100L	270L	350L	936L
Type	Vertical			
Temperature Range	-10~-25℃			
Temperature Accuracy	0.1℃			
Control System	Microprocessor Control, digital display			
Alarm	High and low temperature alarm, sensor failure alarm, door open alarm, etc.	High or low temperature alarm, power outage alarm, Thermostat alarm, Door switch alarm, battery switch alarm		High and low temperature alarm, sensor failure alarm, thermostat failure alarm, power failure alarm, door open alarm, ambient temperature alarm, condenser failure alarm, filter inspection alarm, abnormal voltage alarm, low battery alarm.
Refrigeration Type	Direct refrigeration			
Refrigerant	CFC free			
Condenser	Bundy tube			Copper tube
Structure	Unibody design &mono-assembly foaming			
Internal Material	HIPS	SUS304		
External Material	Sprayed steel plate			
Inner Door	No	4pcs	5pcs	4pcs
Power Supply	Standard: 220V 50Hz, optional: 110V 60Hz			
Casters	No	Yes		
Shelf	2pcs	3pcs	4pcs	3pcs
External Size(mm)	600*620*870	690*744*1631	690*744*1885	1304*1000*2017
Standard Accessory	/	USB port		/
Optional Accessory	USBport	RS485, Printer		USB port, Printer
Packing Size	630*645*905mm	810*860*1820mm	810*860*2100mm	1360*1135*2170mm
Gross Weight	40kg	132kg	145kg	421kg

-25°C Freezer



FMF-25V368D



FMF-25V528D

Technical Parameters

Model		FMF-25V368D	FMF-25V528D
Capacity		368L	528L
Type		Vertical	
Temp. Range		-10°C~-25°C	
Temp. Accuracy		0.1°C	
Control System		Electronic temperature control	
Alarm		Power failure alarm, door ajar alarm, high or low temperature alarm, thermostat failure, battery switch alarm	
Cooling Method		Direct cooling	
Refrigerant		R290	
Condenser		Bundy tube	
Construction	Structure	Unibody design and thickened environmental protection foam insulation layer	
	Internal Material	304 stainless steel	
	External Material	Cold plate spraying	
Inner Door		No	
Consumption		726VA/718W	814VA/821W
Power Supply		Standard: AC220V±10% 50Hz; optional: AC110V±10% 60Hz	
Caster		Yes	
Shelf		Up:2pcs; Down:2pcs	
Standard Accessory		USB port	
Optional Accessory		RS485	
External Size(mm)		750*736*1884	890*810*1884mm
Internal Size(mm)		Up:580*575*563; Down: 580*575*563	Up:720*649*563; Down: 720*649*563
Package Size(W*D*H) mm		890*880*2100	1030*950*2100
Gross Weight		195kg	220kg

Remark: Standard USB, can store 8000 pieces of data per month, data rolling coverage after the limit, can save 120 months of data.

-25°C Freezer



FMF-25H110



FMF-25H210



FMF-25H310

Technical Parameters

Model		FMF-25VH110	FMF-25VH210	FMF-25VH310
Capacity		110L	210L	310L
Temperature Range		-10°C~-25°C		
Temperature Accuracy		0.1°C		
Control System		Microprocessor Control		
Alarm		High or low temperature alarm, Sensor failure, Power failure, Battery switch alarm		
Refrigeration Type		Direct refrigeration		
Refrigerant		R290, 50g	R290, 45g	R290, 65g
Evaporator		Material of copper		
Construction	Structure	Unibody Design, Rigid polyurethane insulation material		
	Internal Material	304 Stainless steel		
	External Material	Powder coated cold rolled steel plate		
Consumption		440VA/270W	440VA/260W	550VA/345W
Power Supply		Standard: 220V 50Hz, optional: 220V 60Hz, 110V 60Hz		
Caster		Yes		
Optional Accessory		USB port		
External Size		705*705*885mm	945*785*885mm	1225*790*885mm
Packing Size		805*800*1015mm	1045*880*1015mm	1325*885*1015mm
Gross Weight		73kg	88kg	101kg

-30°C Freezer



FMF-30V368D



FMF-30V528D

Technical Parameters

Model		FMF-30V368D	FMF-30V528D
Capacity		368L	528L
Type		Vertical	
Temp. Range		-10°C~-30°C	
Temp. Accuracy		0.1°C	
Control System		Electronic temperature control	
Alarm		Power failure alarm, door ajar alarm, high or low temperature alarm, thermostat failure, battery switch alarm	
Cooling Method		Direct cooling	
Refrigerant		R290	
Condenser		Bundy tube	
Construction	Structure	Unibody design and thickened environmental protection foam insulation layer	
	Internal Material	304 stainless steel	
	External Material	Cold plate spraying	
Door		No	
Consumption		726VA/718W	814VA/821W
Power Supply		Standard: AC220V±10% 50Hz; optional: AC110V±10% 60Hz	
Caster		Yes	
Shelf		Up:2pcs; Down:2pcs	
External Size(mm)		750*736*1884	890*810*1884mm
Internal Size(mm)		Up:580*575*563; Down: 580*575*563	Up:720*649*563; Down: 720*649*563
Package Size(W*D*H) mm		890*880*2100	1030*950*2100
Gross Weight		195kg	220kg

Remark: Standard USB, can store 8000 pieces of data per month, data rolling coverage after the limit, can save 120 months of data.

-40°C Freezer(Combined Refrigerator And Freezer)



368L



318L/450L

Technical Parameters

Model	FMF-40V368	FMF-40V318	FMF-40V450
Capacity	Upper:183L; Down:185L	318L (Refrigerator 208L, Freezer 110L)	450L (Refrigerator 295L, Freezer 155L)
Type	Vertical		
Temp. Range	Refrigerator: 2℃~8℃ Freezer: -10℃~-40℃		
Temp. Accuracy	0.1℃		
Control System	Microprocessor Control		
Alarm	BRF-40V368: High or low temperature alarm,sensor failure alarm,power failure alarm,door open alarm. BRF-40V318/BRF-40V450:Power failure alarm, door ajar alarm, high or low temperature alarm, thermostat failure alarm		
Refrigeration Type	Direct Refrigeration		
Refrigerant	R290		
Compressor	2 compressors		
Material	Structure	Uniboday design	
	Internal	304 stainless steel	
	External	Sprayed steel plate	
Door	2pcs		
Consumption	748VA/627W	638VA/460W	638VA/570W
Power Supply	AC220V±10%, 50HZ ; AC110V±10%, 60HZ		
Caster	Yes		
Shelf	Refrigerator: 3pcs Freezer: 1pc		
External Size(W*D*H)	750*736*1884mm	741*631*1889mm	741*811*1889mm
Internal Size(W*D*H)	Upper:580*563*563mm Down:580*567*563mm	Refrigerator:590*495*746 Freezer:520*467*460	Refrigerator:590*675*746 Freezer:520*647*460
Package Size	890*880*2100mm	880*770*2090	880*950*2090
Gross Weight	195kg	178kg	200kg

Remark: Standard USB, can store 8000 pieces of data per month, data rolling coverage after the limit, can save 120 months of data.

-40°C Freezer



FMF-40V58



FMF-40V90



FMF-40V268

Technical Parameters

Model		FMF-40V58	FMF-40V90	FMF-40V268
Capacity		58L	90L	268L
Type		Vertical		
Temp. Range		-15°C~-40°C		
Temp. Accuracy		0.1°C		
Control System		Microprocessor Control	Microprocessor Control; Digital Display	
Alarm		High or low temperature alarm, sensor failure alarm.	High or low temperature alarm, sensor failure alarm, power failure alarm, door open alarm.	High or low temperature alarm, door ajar alarm, power failure alarm, sensor failure alarm.
Refrigeration Type		Direct Refrigeration		
Refrigerant		R404a and R23	R290	
Compressor		1 compressor	Unicompressor, imported famous brand compressor	International well-known brand
Construction	Structure	Uniboday design		
	Internal Material	304 stainless steel		
	External Material	Sprayed steel plate		
Door		1pc	3pcs	4pcs
Consumption		340W/390VA	528VA/252W	484VA/286W
Power Supply		AC220V±10%, 50HZ; AC110V±10%, 60HZ	AC220V±10%, 50/60HZ	AC220V±10%, 50Hz; 110V±10%, 60Hz (Optional)
Caster		Yes		
Shelf		1 pc shelf	2 pcs shelves	3pcs shelves, Stainless Steel
Standard Accessory		/	USB port	
Optional Accessory		USB port	Printer	
External Size(W*D*H)		540*620*1115mm	600*610*945mm	690*744*1631mm
Internal Size(W*D*H)		361*405*406mm	440*447*640mm	520*567*1013mm
Package Size		610*690*1275mm	730*730*1140mm	810*860*1820mm
Gross Weight		98kg	82kg	140kg

-40°C Freezer



FMF-40V362



FMF-40V398



FMF-40V450

Technical Parameters

Model		FMF-40V362	FMF-40V398	FMF-40V450
Capacity		362L	408L	450L
Type		Vertical		
Temp. Range		-15℃~-40℃	-10℃~-40℃	-15℃~-40℃
Temp. Accuracy		0.1℃		
Control System		Microprocessor Control; Digital Display		
Alarm		High or low temperature alarm, door ajar alarm, power failure alarm, sensor failure alarm	High or low temperature alarm, sensor failure alarm	High or low temperature alarm, door ajar alarm, power failure alarm, sensor failure alarm
Refrigeration Type		Direct cooling	Direct Refrigeration	Direct cooling
Refrigerant		R290	CFC free	R290
Compressor		Well-known brand	International well-known brand	Well-known brand
Construction	Structure	Uniboday design		
	Internal Material	Stainless steel		
	External Material	Painted steel panel	Painted steel panel,150mm foaming insulation	Painted steel panel
Znner Door		5pcs	4pcs	5pcs
Consumption		484VA/278W	420W/470VA	946VA/510W
Power Supply		AC220V±10%, 50Hz; 110V±10%, 60Hz	AC220V±10%, 50/60Hz; 110V±10%, 60Hz	Standard: 220V 50Hz, optional: 220V 60Hz, 110V 60Hz
Caster		Yes		
Shelf		4pcs	3pcs shelves,Stainless Steel	4pcs
Standard Accessory		USB port	/	USB port
Optional Accessory		Printer	USB port	Printer
External Size(W*D*H)		690*744*1885mm	890*900*1780mm	750*905*1885mm
Package Size		840*860*2050mm	980*1000*1950mm	855*1000*2080mm
Gross Weight		155kg	215kg	180kg

-40°C Freezer



FMF-40V608



FMF-40V708



FMF-40V808



FMF-40V936

Technical Parameters

Model		FMF-40V608	FMF-40V708	FMF-40V808	FMF-40V936
Capacity		608L	708L	808L	936L
Type		Vertical			
Temp. Range		-10°C~-40°C			-25°C~-40°C
Temp. Accuracy		0.1°C			
Control System		Microprocessor control, LED Digital Display			
Audible and Visual Alarm		High and low temperature alarm, sensor failure alarm. (BDF-40V608, BDF-40V708, BDF-40V808) High and low temperature alarm, sensor failure alarm, thermostat failure alarm, power failure alarm, door open alarm, ambient temperature alarm, condenser failure alarm, filter inspection alarm, abnormal voltage alarm, low battery alarm. (BDF-40V936)			
Alarm Method		Sound beeps and lights flash			
Refrigeration Type		Direct refrigeration			
Refrigerant		R404A and R23			R404A
Construction	Foam Layer Thickness	120mm			150mm
	Internal Material	304 stainless steel			
	External Material	Sprayed steel plate			
Inner Door		4pcs			
Consumption		1000W/1050VA			1000W/950VA
Power Supply		AC110V/220V±10%, 50/60Hz			
Caster		Yes			
Shelf		3pcs			
Optional Accessory		USB port	USB port	USB port	USB port, Printer
External Size(W*D*H) mm		945*1030*1975	1240*1000*2000	1090*1010*2025	1304*1000*2017
Package Size (W*D*H) mm		1120*1080*2010	1280*1080*2150	1280*1080*2150	1360*1135*2170
Gross Weight		288kg	345kg	370kg	416kg

-40°C Freezer



FMF-40V368D



FMF-40V528D

Technical Parameters

Model		FMF-40V368D	FMF-40V528D
Capacity		368L	528L
Type		Vertical	
Temp. Range		-10°C~-40°C	
Temp. Accuracy		0.1°C	
Control System		Electronic temperature control	
Alarm		Power failure alarm, door ajar alarm, high or low temperature alarm, thermostat failure, battery switch alarm	
Cooling Method		Direct cooling	
Refrigerant		R290	
Condenser		Bundy tube	
Construction	Structure	Unibody design and thickened environmental protection foam insulation layer	
	Internal Material	304 stainless steel	
	External Material	Pre-coated galvanized plate	
Inner Door		4pcs	
Consumption		880VA/861W	902VA/909W
Power Supply		Standard: AC220V±10% 50Hz; optional: AC110V±10% 60Hz	
Caster		Yes	
Shelf		4pcs	
Standard Accessory		USB port	
External Size(mm)		750*736*1884	890*810*1884mm
Internal Size(mm)		Up:580*575*563; Down: 580*575*563	Up:720*649*563; Down: 720*649*563
Package Size(W*D*H) mm		890*880*2100	1030*950*2100
Gross Weight		195kg	220kg

-40°C Freezer



FMF-40H110



FMF-40H210



FMF-40H310



FMF-40H485


Technical Parameters

Model	FMF-40H110	FMF-40H210	FMF-40H310	FMF-40H485
Capacity	110L	210L	308L	485L
Temperature Range	-15°C~-40°C			-20°C~-40°C
Temperature Accuracy	0.1°C			
Control System	Microprocessor Control, LED Display			
Alarm	BDF-40H110&BDF-40H210&BDF-40H310: High or low temperature alarm, Sensor failure, Power failure, Battery switch alarm BDF-40H485: High or low temperature alarm, sensor failure alarm, Power failure alarm, Temperature controller failure alarm			
Refrigeration Type	Direct Refrigeration			
Refrigerant	R290, 55g	R290, 60g	R290, 70g	R290
Evaporator	Material of Copper			
Construction	Structure	Unibody Design & Mono-assembly foaming (Rigid polyurethane insulation material)		
	Internal material	304 Stainless Steel		
	External material	Powder coated cold rolled steel plate		
Consumption	550VA/270W	550VA/280W	528VA/290W	295W/290VA
Power Supply	Standard: 220V 50Hz; optional: 110/220V 60Hz			Standard: 220V 50/60Hz; optional: 110V 50/60Hz
Caster	Yes			
Optional Accessory	USB port			/
External Size(L*W*H) mm	705*705*885	945*785*885	1225*790*885	1655*755*915
Package Size(L*W*H) mm	805*800*1015	1045*880*1015	1325*885*1015	1775*900*1060
Gross Weight	73kg	88kg	101kg	138kg

-60°C Freezer



FMF-60V608

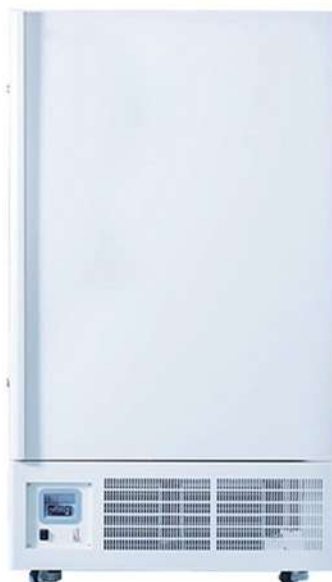

FMF-60V708



FMF-60V808



FMF-60V938

Technical Parameters

Model		FMF-60V608	FMF-60V708	FMF-60V808	FMF-60V938
External Size(W*D*H) mm		940*980*1920	1090*1000*1920	1090*1010*2025	1240*1000*2000
Internal Size(W*D*H) mm		700*680*1255	850*680*1255	850*735*1335	1000*700*1335
Capacity		598L	708L	808L	938L
Type		Vertical			
Temp. Range		-25℃~-60℃			
Temp. Accuracy		0.1℃			
Control System		Microprocessor control, LED Digital Display			
Audible and Visual Alarm		High and low temperature alarm, sensor failure alarm.			
Alarm Method		Sound beeps and lights flash			
Refrigeration Type		Direct refrigeration			
Refrigerant		R404A and R23			
Construction	Foam Layer Thickness	120mm			
	Internal Material	304 stainless steel			
	External Material	Sprayed steel plate			
Consumption		1100W/3300VA	1100W/3300VA	1150W/3450VA	1150W/3450VA
Power Supply		AC110V/220V±10%, 50/60Hz			
Optional Accessory		USB port			
Package Size(W*D*H) mm		1025*1050*2090	1220*1080*2070	1175*1075*2180	1325*1070*2170
Gross Weight		315kg	350kg	365kg	405kg

-60°C Freezer



FMF-60V30

FMF-60V58

FMF-60V108

FMF-60V158

FMF-60V398

Technical Parameters

Model	FMF-60V30	FMF-60V58	FMF-60V108	FMF-60V158	FMF-60V398
External Size(W*D*H)mm	470*490*1120	540*620*1115	700*730*1260	700*700*1580	850*960*1860
Internal Size(W*D*H)mm	270*265*400	361*405*406	460*460*510	460*455*800	610*660*1200
Capacity	30L	58L	108L	158L	408L
Temp.Range	-25°C ~ -60°C, adjustable				
Temp.Accuracy	0.1°C				
Control System & Display	Microprocessor control, LED display				
Audio & Visual Alarm	High or low temperature alarm ;Sensor failure alarm				
Refrigeration Type	Optimized auto-cascade refrigerating system				
Refrigerant	Unique fluoride-free mixed refrigerant, CFC-Free				
Condenser & Evaporator	Optimized evaporation and condensation system, strong cooling and low energy consumption				
Construction	Structure	100mm foam layer	90mm ultra-thick foam layer	120mm ultra-thick foam layer	150mm ultra-thick foam layer
	Internal Material	304 stainless steel			
	External Material	Sprayed steel plate			
Consumption	400W/1200VA	450W/1350VA	480W/1440VA	500W/1500VA	550W/1650VA
Power Supply	AC110V/220V±10%,50/60Hz				
Optional Accessory	USB port				
Package Size(W*D*H)mm	540*560*1285	610*690*1275	785*800*1430	785*770*1750	935*1030*2030
Gross Weight	85kg	101kg	133kg	150kg	250kg

-60°C Freezer



60L



118L / 220L / 320L



458L

Safety system

1. Perfect alarm system with buzzer sound and lamp flashing alarm functions
2. High temperature alarm & Temperature sensor failure alarm
3. Multiple-protection function (Password protection, power-on delay, time between stops, refrigeration system operation protection during sensor failure)

Technical Parameters

Model	FMF-60H58	FMF-60H118A	FMF-60H218	FMF-60H318	FMF-60H458
External Size(W*D*H) mm	670*765*905	900*765*945	1160*765*885	1530*765*885	2115*895*1095
Internal Size(W*D*H) mm	470*470*300	696*470*385	960*470*595	1330*470*595	1380*500*660
Capacity	60L	118L	220L	320L	458L
Temp. Range	-25°C~-60°C, adjustable				
Temp. Accuracy	0.1°C				
Control System & Display	Microprocessor control, LED display				
Audio & Visual Alarm	High or low temperature alarm;Sensor failure alarm				
Refrigeration Type	Optimized auto-cascade refrigerating system				
Refrigerant	Unique fluoride-free mixed refrigerant, CFC-Free				
Condenser & Evaporator	Optimized evaporation and condensation system, strong cooling and low energy consumption				
Construction	Structure	100mm(150mm only for BDF-60H458) ultra-thick foam layer, dual-sealing design of door, for effective temperature protection			
	Internal Material	304 stainless steel			
	External Material	Sprayed steel plate			
Consumption	330W/990VA	340W/1020VA	400W/1200VA	480W/1440VA	520W/1560VA
Power Supply	AC110V/220V±10%,50/60Hz				
Optional Accessory	USB port		/	/	USB port
Package Size(W*D*H) mm	740*835*1075	1020*830*1075	1230*835*1055	1600*835*1055	2215*935*1245
Gross Weight	101kg	128kg	143kg	170kg	255kg

-86°C Freezer



FMF-86V28



FMF-86V50



FMF-86V58



FMF-86V108

Technical Parameters

Model	FMF-86V28	FMF-86V50	FMF-86V58	FMF-86V108	
External Size(W*D*H)mm	505*520*1165	660*715*1165	635*757*1212	700*730*1260	
Internal Size(W*D*H)mm	266*281*400	360*456*395	330*453*410	460*460*510	
Capacity	28L	50L	58L	108L	
Type	Vertical				
Temp. Range	-40℃~-86℃				
Temp. Accuracy	0.1℃				
Control System	Microprocessor control, 7-inch LCD touch screen				
Alarm	High and low temperature alarm, sensor failure alarm	High and low temperature alarm, power fault alarm, thermostat fault alarm	High and low temperature alarm, sensor failure alarm, thermostat failure alarm power failure alarm,door open alarm, ambienttemperature alarm,condenser failure alarm,filter inspection alarm, abnormal voltage alarm,low battery alarm	High and low temperature alarm, sensor failure alarm	
Alarm Method	Sound beeps and lights flash				
Refrigeration Type	Direct refrigeration				
Refrigerant	R404a, R23	R600a 85g, R290 15g, R1150 27g, R14 20g	R290, R170	R404a, R23	
Compressor	1 pc				
Construction	Foam Layer Thickness	100mm	130mm	150mm	120mm
	Internal Material	304 stainless steel			
	External Material	Sprayed steel plate			
Chamber with Inner Door	1	1	1	2	
Shelf	1	1	1	2	
Temp. Test Port	1 pc, dia. 18mm	1 pc, dia. 30mm	1 pc, dia. 25mm	1 pc, dia. 18mm	
Consumption	390W/1170VA	540W/550VA	442W/400VA	520W/1560VA	
Power Supply	AC110V/220V±10%, 50/60Hz	AC110-220V, 50/60Hz	AC110V/220V±10%, 50/60Hz	AC110V/220V±10%, 50/60Hz	
Standard Accessory	/	/	USB port	/	
Optional Accessory	USB port	USB port	Printer	USB port	
Package Size(W*D*H)mm	580*600*1325	765*825*1350	730*845*1400	785*800*1430	
Gross Weight	85kg	134kg	155kg	133kg	

-86°C Freezer



BDF-86V158



BDF-86V348

Technical Parameters

Model	BDF-86V158	BDF-86V348
Capacity	158L	348L
Shelf	2 pcs, S.S.	3 pcs, S.S.
Refrigeration Type	Direct refrigeration	
Defrosting Type	Manual	
Refrigerant/g	Mixed refrigerant, CFC free	
Noise	60dB(A)	60dB(A)
Ambient Temp.	10~32°C	
Temp. Range	-40°C~-86°C	
Evaporator	Built-in coil, copper pipe	
Condenser	Copper tube and aluminum fin	
Sensor	PT1000	
Thermostat	Electronic thermostat	
Display	LED	
Power Supply	110~220V/50~60Hz	
Power	650W/858VA	
Current	3.9A	3.9A
Internal Material	S.S. 304	
External Material	Sprayed cold-rolled steel plate	
Lagging	Foamed polyurethane cyclopentane	
Audible and Visual Alarm	High and low temperature alarm, Power fault alarm, Thermostat fault alarm, Door switch alarm	
Optional Accessory	USB port	
Temp. Test Port	1 pcs, φ30mm	
Net Weight	168kg	232kg
Gross Weight	221kg	300kg
Internal Size(W*D*H)	465*455*820mm	490*612*1150mm
External Size(W*D*H)	844*807*1594mm	869*989*1924mm
Package Size(W*D*H)	1000*970*1790mm	1020*1180*2130mm

-86°C Freezer



FMF-86V168T



FMF-86V348T

Technical Parameters

Model		FMF-86V168T	FMF-86V348T
External Size(W*D*H) mm		844*807*1594mm	869*989*1924mm
Internal Size(W*D*H) mm		465*455*820mm	490*612*1150mm
Capacity		168L	348L
Type		Vertical	
Temp. Range		-40°C~-86°C	
Temp. Accuracy		0.1°C	
Control System		Microprocessor control, 8 inch touch LCD screen	
Audible and Visual Alarm		High and low temperature alarm, sensor fault alarm, power alarm, open and close abnormal alarm function	
Alarm Method		Sound beeps and lights flash, remote alarm(optional)	
Refrigeration Type		Double machine cascade refrigeration system	
Refrigerant		R290 and R170	
Compressor		2 sets	
Condenser& Evaporator		Made of copper	
Construction	Foam Layer Thickness	150mm	
	Internal Material	304 stainless steel	
	External Material	Spray steel plate	
Door		Lockable door	
Caster		4 casters	
Chamber with Inner Door		3	2
Shelf		2pcs	3pcs
Temp. Test Port		1, Φ30mm	
Consumption		830W/1386VA	915W/1385VA
Standard Accessory		USB port	
Optional Accessory		RS485	
Power Supply		Standard: 220V 50Hz Optional: 220V 60Hz, 110V, 60Hz	
Package Size (W*D*H) mm		880*840*1700	1020*1180*2130
Gross Weight		253kg	332kg

-86°C Freezer



FMF-86V418T



FMF-86V608T

Technical Parameters

Model	FMF-86V418T	FMF-86V608T
Capacity	418L	608L
Shelf	3 pcs, S.S.	
Refrigeration Type	Direct refrigeration	
Defrosting Type	Manual	
Refrigerant/g	Mixed refrigerant, CFC-free	
Noise	60dB(A)	
Ambient Temp.	10~32°C	
Temp. Range	-40°C~-86°C	
Evaporator	Built-in coil, copper pipe	
Condenser	Copper tube and aluminum fin	
Sensor	PT100	
Thermostat	Electronic thermostat	
Display	LCD	
Power Supply	110/220V, 50/60Hz	
Power	1070W/1870VA	1110W/1870VA
Current	8.5A	
Internal Material	S.S. 304	
External Material	Sprayed cold-rolled steel	
Lagging	Foamed polyurethane cyclopentane	
Audible and Visual Alarm	High and low temperature alarm, Power fault alarm, Thermostat fault alarm, Door ajar alarm	
Interface	RS485	
Door	Lockable outer door, 3 inner doors	
Temp. Test Port	1, φ30mm	
Standard Accessory	USB port	
Optional Accessory	RS485	
Net Weight	315kg	360kg
Gross Weight	345kg	390kg
Internal Size(W*D*H)	600*612*1150mm	620*755*1280mm
External Size(W*D*H)	980*988*1945mm	1000*1147*1996mm
Package Size(W*D*H)	1130*1170*2150mm	1150*1280*2210mm

-86°C Freezer



Technical Parameters

Model		FMF-86V408D	FMF-86V588D	FMF-86V838D
Capacity		408L	588L	838L
Type		Vertical		
Temp. Range		-40℃~-86℃		
Temp. Accuracy		0.1℃		
Control System		Microprocessor control, 7-inch LCD touch screen		
Alarm		High and low temperature alarm, sensor fault alarm, condenser fouling alarm, ambient temperature alarm, abnormal voltage alarm, power off alarm, door ajar alarm, low battery alarm, with remote alarm interface, all alarm information and history can be queried on the LCD screen		
Alarm Method		Sound beeps and lights flash, remote alarm, and SMS alarm is optional		
Refrigeration System		Two independent refrigeration systems		
Refrigeration Type		Direct refrigeration		
Refrigerant		Non-azeotropic mixed refrigerant R4001		
Compressor		2 pcs		
Construction	Foam Layer Thickness	100mm		
	Internal Material	304 stainless steel		
	External Material	Sprayed steel plate		
Door		1 pc sprayed steel plate outer door, 2 pcs 304 stainless steel inner door		
Caster		4 casters		
Shelf		3 pcs, 304 stainless steel		
Temp. Test Port		1 pc, dia. 25mm		
Standard Accessories		USB port		
Optional Accessories		Temperature recorder		
Consumption		1350W	1500W	1700W
Power Supply		220V/50Hz		
External Size(W*D*H)mm		891*992*1945.5	891*1155*1994.5	1179*1135*1994.5
Internal Size(W*D*H)mm		606*575*1180	606*738*1310	894*718*1310
Package Size(W*D*H)mm		970*1138*2185	954*955*2094	1262*1098*2185
Gross Weight		332kg	310kg	424kg

-86°C Freezer



588L

728L

838L

Technical Parameters

Model		FMF-86V588	FMF-86V728	FMF-86V838
External Size(W*D*H) mm		880*1080*2000	1260*890*2010	1175*1075*1990
Internal Size(W*D*H) mm		606*738*1310	963*558*1350	894*718*1310
Capacity		588L	728L	838L
Type		Vertical		
Temp. Range		-40℃~-86℃		
Temp. Accuracy		0.1℃		
Control System		Microprocessor control, LCD touch screen		Microprocessor control, LED Digital Display
Audible and Visual Alarm		High and low temperature, Sensor failure, Door ajar, Power failure, Voltage abnormal, Ambient temperature abnormal,Low voltage, Filter blocking		
Refrigeration type		Direct refrigeration		
Refrigerant		R290 and R170		
Compressor		2 sets		
Condenser&Evaporator		Made of copper		
Construction	Structure	150mm ultra-thick foam layer	100mm ultra-thick foam layer	150mm ultra-thick foam layer
	Internal Material	SS 304		
	External Material	Sprayed steel plate		
Door		Lockable door		
Caster		4 casters		
Chamber with Inner Door		2		
Shelf		3 pcs		
Temp. Test Port		1, φ25mm	1,φ25mm	1,φ25mm
Consumption		815W/760VA	935W/800VA	1700W/1400VA
Power Supply		AC110V/220V±10%, 50/60Hz		
Standard Accessory		72 hours battery backup for power failure alarm, USB port		
Optional Accessory		/	/	Printer
Max. Optional Storage Racks		16*LD5×5	24*LD5×4	24*LD5*5
Max. Optional Boxes		400	480	630
Package Size (W*D*H) mm		975*1140*2200	1320*970*2190	1270*1100*2185
Gross Weight		368kg	401.5kg	430kg

-86°C Freezer



FMF-86H50



FMF-86H118

Technical Parameters

Model	FMF-86H50	FMF-86H118
Capacity	50L	118L
Refrigeration Type	Direct refrigeration	
Defrosting Type	Manual	
Refrigerant/g	Mixed refrigerant, CFC free	
Noise	60dB(A)	
Ambient Temp.	10~32°C	
Temp. Range	-40°C~-86°C	
Evaporator	Built-in coil, copper pipe	
Condenser	Copper tube and aluminum fin	
Sensor	PT1000	
Thermostat	Electronic thermostat	
Display	LED	
Power Supply	110~220V/50~60Hz	
Power	540W/550VA	510W/528VA
Current	2.5A	2.4A
Internal Material	S.S. 304	S.S. 304
External Material	Spray cold-rolled steel plate	
Lagging	Foamed polyurethane cyclopentane	
Audible and Visual Alarm	High and low temperature alarm, Power fault alarm, Thermostat fault alarm, Door switch alarm	
Optional Accessory	USB port	
Net Weight	83kg	103kg
Gross Weight	125kg	150kg
Internal Size(W*D*H)	430*400*350mm	540*400*580mm
External Size(W*D*H)	695*740*985mm	1140*730*930mm
Package Size(W*D*H)	810*830*1180mm	1240*800*1065mm

-150°C Freezer



FMF-150H58



FMF-150H128

Technical Parameters:

Model		FMF-150H58	FMF-150H128
External Size(W*D*H) mm		670*765*1040	1560*957*1178
Internal Size(W*D*H) mm		410*410*385	500*450*578
Capacity		58L	128L
Type		Horizontal	
Temp. Range		-100~-145℃	-40~-150℃
Temp. Accuracy		0.1℃	0.1℃
Control System		Microprocessor control, LED Digital Display	Microprocessor control, LCD touch screen
Audible and Visual Alarm		Over temperature alarm	High temperature alarm, low temperature alarm, abnormal power supply alarm, sensor failure alarm, thermostat failure alarm, filter screen inspection alarm, ambient temperature alarm, condenser failure alarm.
Alarm Method		Sound beeps and lights flash	
Refrigeration type		Direct refrigeration	
Refrigerant		Mixed refrigerants	
Compressor		1 set	1 set
Construction	Foam Layer Thickness	130mm	200mm
	Internal Material	304 stainless steel	
	External Material	Sprayed steel plate	
Optional Accessory		USB port	
Consumption		1800W/3600VA	2550W/7650VA
Power Supply		380V, 50Hz	
Package Size (W*D*H) mm		710*810*1080	1637*970*1383
Gross Weight		115kg	340kg

Vertical Freezer Rack



Features

- * Made of corrosion-resistant 304 stainless steel for repeated freeze-thaw and long-term storage of samples.
- * It can be used for sample storage in ultra-low temperatures.
- * It can withstand temperature range of -196°C to 800°C.
- * It is suitable for 1-inch and 2-inch freezer boxes.
- * It is suitable for most standard refrigerators and liquid nitrogen containers.
- * It can be customized.

Technical Parameters

Model	Specification	Material	Size W*D*H(mm)	Freezer Box Size(mm)	Freezer Tube
BK-LD7	7 Layers	304 Stainless Steel	142*140*414	133*133*52	1.5-2ml
BK-LD8	8 Layers	304 Stainless Steel	142*140*472	133*133*52	1.5-2ml
BK-LD9	9 Layers	304 Stainless Steel	142*140*530	133*133*52	1.5-2ml
BK-LD10	10 Layers	304 Stainless Steel	142*140*588	133*133*52	1.5-2ml
BK-LD11	11 Layers	304 Stainless Steel	142*140*624	133*133*52	1.5-2ml
BK-LD12	12 Layers	304 Stainless Steel	142*140*680	133*133*52	1.5-2ml
BK-LD13	13 Layers	304 Stainless Steel	142*140*736	133*133*52	1.5-2ml
BK-LD14	14 Layers	304 Stainless Steel	142*140*792	133*133*52	1.5-2ml
BK-LD15	15 Layers	304 Stainless Steel	142*140*878	133*133*52	1.5-2ml



Unit 5/6 Stanton Road, Seven Hills, NSW 2147



flo-maxpumps.com.au



1 800 730 104



sales@flo-maxpumps.com.au

